Adding Your Aroma360 Oil

- 1 Be certain the diffuser is unplugged or powered off before proceeding. Unscrew the aluminum oil bottle from the atomizer.
- 2 You will see an oil pipette affixed to a nozzle. Pour your Aroma360 oil into the provided aluminum bottle. Then, screw in the aluminum bottle until it is tightly secured.
 - Do not overfill the bottle.
- Only Aroma360 oils should be used in the Museum360; using any other oils may damage the unit and will void the warranty.
- 3 Screw in the fragrance bottle to the atomizer. Ensure it is inserted tightly and straight otherwise, the oil will leak. Once the fragrance bottle is secured, you may turn on or plug in the diffuser
- 4 When changing scenting oils, remove any oils in the bottle inside first. (You may dispose of it or pour it back into the original bottle). Pour some rubbing alcohol into the aluminum bottle, about ¼ full. Diffuse the rubbing alcohol for about 15-30 minutes.
- 5 Remove any additional rubbing alcohol, rinse and dry the bottle as best as possible before pouring in the new fragrance oil.

Tips for Using Your Museum360

- Diffusing rubbing alcohol every three months helps maintain the diffuser and prevent oil from clogging your system.
- Please ensure the Museum360 and atomizers are always kept in the upright position, away from any kind of moisture and extreme temperatures, and also out of reach of children.
- Always make sure the unit is either powered off or unplugged before adding or removing the oil canister.
- Always remove oil when transporting the unit.
- To remove the thick or thin tubing from the atomizer or diffuser, simply press
 down on the black outer portion of the tube connector and the tubing will
 release as the black outer ring is a "release" button.

Technical Specifications

Unit Dimension	14 ¾ x 7 x 9 ½ (inches) 37.46 x 17.78 x 24.13 (cm)
Voltage	110v
Power	50 watts or 2.2 amps
Noise Level	< 56dba
Unit Weight	19.6 lbs. (8.89 kgs)
Coverage	6,000 sq. ft. 557m2)
Color	Black
dispersion	HVAC Only
i	

Troubleshooting

PROBLEM	REASON
No LCD Indication	Power is not getting to the unit or the unit is turned off.
SOLUTION	Plug in the unit and press the silver button that is on the lower side part of the Museum360.
No Mist/Scent	Make sure the unit is plugged in. Check the LCD display. If it says "OFF", the unit is not set to be working at that time. If the unit says "PAUSE" it's on the pause portion of the interval. Oil could be out.
SOLUTION	Ensure the power is connected and adjust the event times and days so that the unit is set to "ON". Also check the oil canister to make sure there is oil in the bottle.
Low Mist/Scent	The nozzle may be clogged.
SOLUTION	Run with rubbing alcohol for 3 minutes or change the nozzle.
Oil Leakage	Ensure the Museum360 is a full upright position.
SOLUTION	Remove the fragrance bottle and reattach making sure it is screwed in straightly and is very tight.
Buttons are not working	The unit's settings may be locked.
SOLUTION	Hold down the "SET" button for 10 seconds until you hear a beep. The sound will indicate "lock mode" has been disabled.



AROMA360



The

MUSEUM360

Welcome to the world of Aroma360 scenting!

With your Aroma360 scent diffuser, you'll be able to create a beautifully scented ambiance in a few simple steps.

Through the advanced technology of Cold-Air Diffusion, your discreet and sleek Aroma360 diffuser is a convenient and practical solution to enhance any space you desire.



At a Glance

LCD Screens — The Museum360 has two LCD screens to offer dual-scenting power.

POWER — The unit has three power buttons. The center switch underneath the LCD screens turn on the unit. The individual switches underneath the LCD screens power the corresponding sides of the Museum360.

LOCK SETTINGS — If you want to lock the settings to prevent tampering, hold down the SET button for 20 seconds. This will prevent anyone from adjusting the settings on the unit. You will hear a beep that confirms the settings have been locked. Repeat to unlock the settings. You will need to unlock the unit to adjust the settings.

FACTORY RESET — If you want to reset the unit to the factory settings, hold down the MODE button for 20 seconds and the unit will return to the original settings.

HVAC CONNECTION — Your Museum360 is meant to be used in conjunction with the central air conditioning system.

Understanding Your Museum360

The Museum360's LCD display provides valuable information about your settings. Here is a guick guide on what each item means.

WORK/PAUSE — When the unit is in WORK mode, it is emitting aroma. When the unit is in PAUSE mode, it is not emitting aroma.

TIME — The number displayed on the unit should represent the current time, using the 24-hour clock.

DAY OF THE WEEK — The Museum360 allows you to have different settings for multiple days. The day that's shown on the display should be the current day.

 ${\sf SCENT/WORK/PAUSE-This}$ screen appears when adjusting the scenting strength.

What's included:

- The Museum360 Diffuser Unit
- 1 or 2 Empty Aluminum Bottles
- 1 or 2 Atomizers with Attached Wall-Mountable Plate
- Power Cord
- Thick Transparent Tubing
- Thin White Tubing
- Wall Mounting Brackets
- Spare Nozzle


Setting Up Your Museum360

- Unbox your diffuser to reveal your new Museum360. Familiarize yourself with the parts and accessories.
- 2 Connect the 10A-125V power cord to the diffuser and plug it into a regular 110v outlet. Press the center button to power the unit on. Press the switch underneath the LCD screen to power on the individual sides. Turn both sides on if you are using the Museum360 as a Double.

Now that the diffuser is powered on, you may begin adjusting the settings to your liking. By default, the LCD screen will depict the current time. Note the unit uses a 24-hour clock so 5:30pm will be shown as 17:30


Installing your Museum360

- 1 Ensure that your diffuser is powered off and unplugged. Affix the provided wall plate and atomizer as close to the ductwork as possible. Unscrew the bottle from the wall plate and atomizer. Pour in your Aroma360 fragrance oil and tightly screw the bottle back into place.
- 2 Insert one end of the thin white tube into the hole on the back of the diffuser on the side you have set and are prepared to use. Insert the other end into the top of the atomizer. Cut away any excess tubing.
- 3 Just after your HVAC filter, use a screwdriver or a drill to make a small hole (or two if you are installing a Double Museum360) in the ductwork. These scent points should be the same diameter as the thick transparent tube.
- 4 Insert one end of the thick tube about 6" into the scent hole and the other end into the larger hole at the top of the atomizer. Cut away any excess tubing and seal the scent point (see below) with HVAC tape. Ensure your tubing is vertical and not horizontal.
- 5 Plug in and turn on your diffuser to begin enjoying your consistent scenting experience.

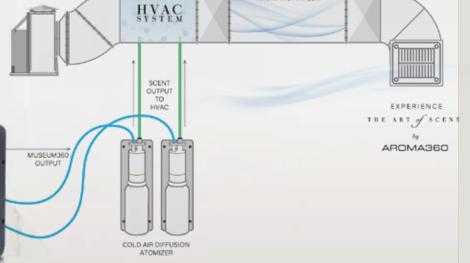

Setting the Current Time

- 1 To set the current time, press SET and the hour will flash. Press UP or DOWN to adjust to the current hour and press SET to confirm your choice. (If your screen is unresponsive, press and hold the SET button for 20 seconds).
- 2 The minutes will now be flashing. Press UP or DOWN to adjust to the current minute and press SET to confirm your choice.
- 3 The day of the week will now be flashing. Press UP or DOWN to adjust to the current day of the week and press SET to confirm.



Setting the Operating Hours

Now it's time to set your scenting events. The Museum360 allows up to five individual events to scent at different times throughout the days of the week.

- 1 To set the start time of an operating period: Press MODE. EVENT 1 ON will appear. This represents the On Time for the first working period. Set time as instructed above.
- 2 To set the operating days: Press UP or DOWN. The days of the week will begin to flash. Select the days you wish to apply the working hours to. Once the desired days have been selected, press SET to confirm.
- 3 To set the end time of the operating period: Press MODE. EVENT 1 OFF will appear. This represents the Off Time for the first operating period. Press UP or DOWN to adjust the hour, press SET to confirm. Repeat to set the minutes.
- 4 Repeat these steps to set Events 2-5, if need be.
- Ensure there are no conflicting settings.
- The unit cannot be set to run past midnight. You must split the setting between two different working periods. For example:
 - i. EVENT 1 ON 22:00 EVENT 1 OFF 23:59
- ii. EVENT 2 ON 00:01 EVENT 2 OFF 04:00

How to Adjust the Scent Intensity

- 1 Press MODE and the display will show SCENT WORK PAUSE. This is where you will adjust the scent intensity for EVENT 1. You can set it between 5% and 95% (with 5% being the lowest setting and 95% being the highest setting). Press SET to confirm the intensity.
- 2 Once you have the desired scent intensity, press MODE and EVENT 2 ON will appear. This will allow you to set the On Time for the second and remaining EVENTS. If you only have one EVENT, then press MODE until you reach the end of the event settings.